

PIXEL

Segnapasso a parete a led per esterni ed interni. Corpo in alluminio pressofuso anticorrosione, verniciato con polveri epossidiche, colore bianco opaco, grigio opaco, antracite o marrone scuro.

Indoor and outdoor led wall steplight fitting. Die-cast aluminum body painted with epoxy powders, matt white, matt grey, anthracite or dark brown color.

CARATTERISTICHE / MAIN FEATURES



Class I



CE



IP 66



IK 08



7
WARRANTY



CRI
>80



L80-B50
75.000h



Mac Adams 3



RG0
RG1



Bordo
Mare



Bianco
White



Grigio
Grey



Antracite
Anthracite



Corten



CODIFICA CODICE / CODING

Art.	+	Mod.	+	°K (CRI)	+	W. tot.	+	Options	
1002		AR		27 = 2700°K (CRI >80) *		03		BL = on/off	○ Bianco opaco / Matt white
				30 = 3000°K (CRI >80)		04		GL = on/off	○ Grigio opaco / Matt grey
				40 = 4000°K (CRI >80)		09		NL = on/off	● Antracite / Anthracite
								CL = on/off	● Corten / Corten

* disponibilità su richiesta / * available on request

Δ LUMEN

	°K	CRI	% Lm
27	2700	> 80	-8.09%
30	3000	> 80	-5.15%
40	4000	> 80	standard

DOTAZIONE / STANDARD EQUIPMENT

- Alimentatore elettronico interno.
- Inner electronic driver.

Mod. AR

Ottica

Diffusore in vetro sabbiato.

Corpo




Corpo in alluminio pressofuso anticorrosione, verniciato con polveri epossidiche, colore bianco opaco, grigio opaco, antracite o marrone scuro.

Optic

Asymmetric aluminium reflector. Extra-clear glass diffuser.


Body

Die-cast aluminum body painted with epoxy powders, matt white, matt grey, anthracite or dark brown color.

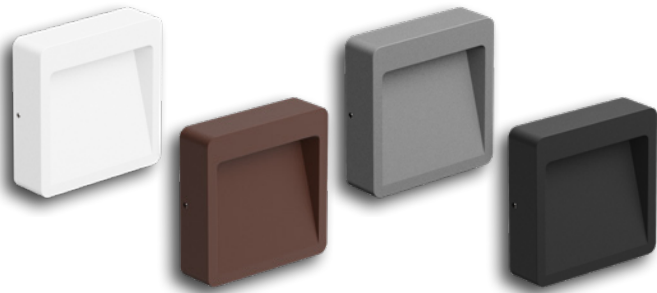

ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF
E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF

Code	W	°K	CRI	Lm OUTPUT	LxPxH (mm)	Col.
1002AR4004BL	4	4000	≥80	420	120 x 35 x 120	○
1002AR4006BL	6	4000	≥80	463	120 x 35 x 120	○
1002AR4004BL	9	4000	≥80	765	120 x 35 x 120	○
1002AR4004GL	4	4000	≥80	420	120 x 35 x 120	●
1002AR4006GL	6	4000	≥80	463	120 x 35 x 120	●
1002AR4004GL	9	4000	≥80	765	120 x 35 x 120	●
1002AR4004NL	4	4000	≥80	420	120 x 35 x 120	●
1002AR4006NL	6	4000	≥80	463	120 x 35 x 120	●
1002AR4004NL	9	4000	≥80	765	120 x 35 x 120	●
1002AR4004CL	4	4000	≥80	420	120 x 35 x 120	●
1002AR4006CL	6	4000	≥80	463	120 x 35 x 120	●
1002AR4004CL	9	4000	≥80	765	120 x 35 x 120	●



INSTALLAZIONE / INSTALLATION

Installazione a parete

Wall mount

Scatola da incasso standard 503

Recess box 503

